

1.


Rotational Inertia of Geometrical Bodies

(a)

Annular cylinder about its central axis

Let R_2 be the outer radius of the annular cylinder and R_1 be its inner radius, and l be its length. Let ρ be its density.

Annular cylinder (or ring) about central axis

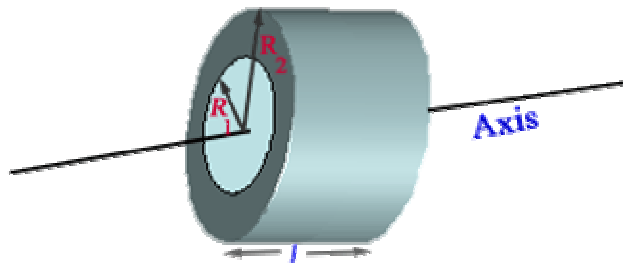

We will calculate expression for the rotational inertia by integrating with variable r , the radial distance measured from the axis.

Mass of annular cylinder is given by the integral

$$M = \int_{R_1}^{R_2} 2\pi r l \rho dr$$

$$= \pi l \rho (R_2^2 - R_1^2).$$

Its rotational inertia is given by the integral

$$I = \int_{R_1}^{R_2} 2\pi r l \rho dr \times r^2,$$


$$= \frac{1}{2} \pi l \rho [R_2^4 - R_1^4]$$

$$I_{\text{annular cylinder}} = \frac{1}{2} M (R_2^2 + R_1^2).$$

(b)

Solid cylinder (or ring) about central axis

Solid cylinder (or disk) about central axis

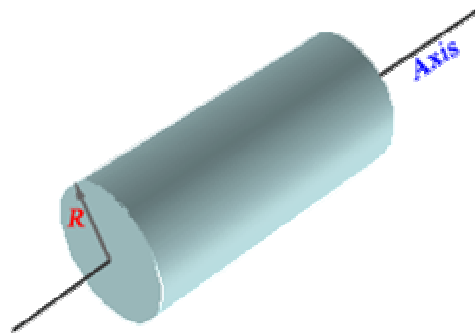


Let the radius of the cylinder be R and its mass M . We can obtain its rotational inertia I from the formula for the

rotational inertia of an annular cylinder by substituting $R_1 = 0$ and $R_2 = R$.

We have


$$I_{\text{solid cylinder}} = \frac{1}{2}MR^2.$$

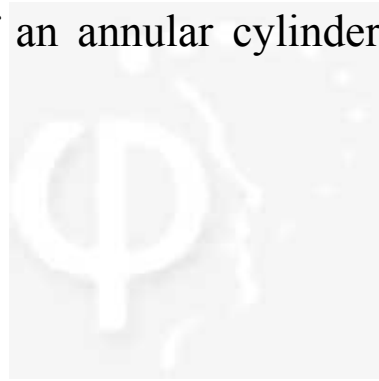


(c)

Solid disk of width Δh

Thin circular disk of width Δh

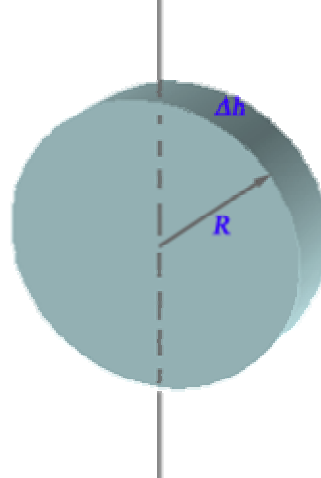

Let R be the radius, Δh thickness and ρ be the density of the disk. For calculating the rotational inertia about the axis as shown in the figure we choose angular variable θ measured from the vertical direction, and consider an infinitesimal box of length dx , height dy and width Δh .

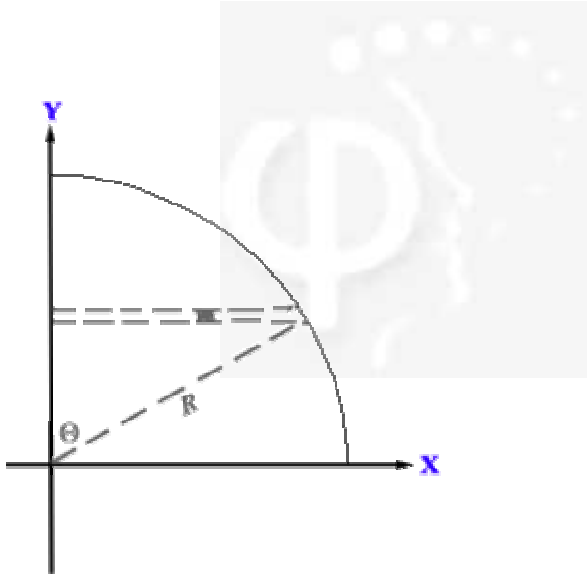

The moment of inertia can be found by integrating

$$I = 4 \int_0^R dy \int_0^{R \sin \theta} \rho \Delta h x^2 dx.$$

As $y = R \sin \theta$,

$$dy = -R \cos \theta d\theta.$$

Therefore,

$$\begin{aligned} I &= 4 \times \int_0^{\pi/2} R \sin \theta d\theta \int_0^{R \sin \theta} x^2 \Delta h \rho dx, \\ &= \frac{4}{3} \Delta h \rho R^4 \int_0^{\pi/2} \sin^4 \theta d\theta, \\ &= \frac{4}{3} \Delta h \rho R^4 \times \frac{3\pi}{16}, \\ &= \frac{\pi}{4} \times \rho R^4 \Delta h. \end{aligned}$$


But the mass of the disk is

$$M = \int_0^R 2\pi r \Delta h \rho dr$$
$$= \pi R^2 \Delta h \rho.$$

Thus the moment of inertia of a thin disk of mass M is

$$I_{thin\ disk} = \frac{1}{4} MR^2.$$

We will use the parallel axis theorem for finding the rotational inertia of a thin disk about an axis parallel to the vertical axis passing through its centre.

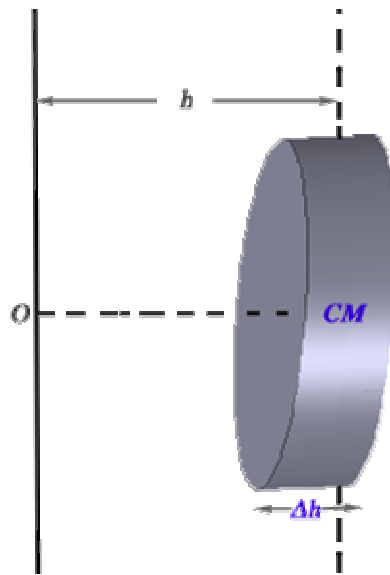

This gives

$$I_O = I_{CM} + Mh^2.$$

Using the expression of rotational inertia of a thin disk, we have


$$I_{O \text{ thin disk}} = \frac{\pi}{4} \rho R^4 \Delta h + \pi R^2 \rho \Delta h h^2.$$

(d)

Cylinder about axis through its CM

We will use this result for calculating the rotational inertia of a solid cylinder of length L , radius R , and mass M about a vertical axis passing through its centre of mass.

Rotational inertia of cylinder about axis through its CM

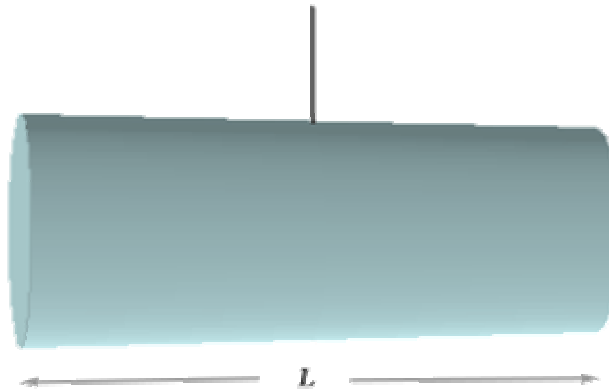

$$I = 2 \left[\frac{1}{4} \times \rho R^4 \pi \int_0^{L/2} dh + \rho R^2 \pi \int_0^{L/2} h^2 dh \right]$$


$$= \frac{1}{4} \times \rho R^4 \pi L + \frac{1}{12} \times \rho R^2 \pi L^3.$$

Mass of the cylinder M is

$$M = \pi R^2 L \rho.$$


We thus find that the rotational inertia of a cylinder about axis as shown in the figure is

$$I_{cyl} = \frac{1}{4} \times MR^2 + \frac{1}{12} ML^2.$$

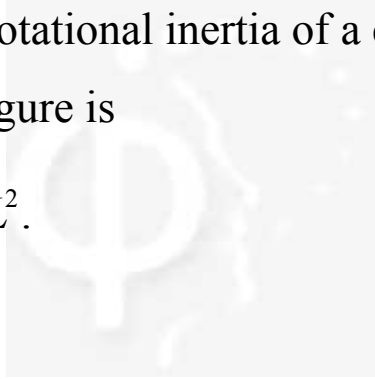

(e)

Thin rod about an axis through its centre

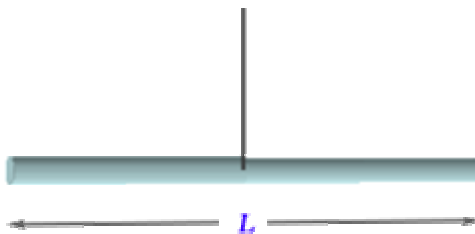


Rotational inertia of a thin rod of length L and mass M about an axis passing through its centre can be obtained from the above result by putting in it $R = 0$. We get

$$I_{thinrod} = \frac{1}{12} ML^2.$$

(f)

Thin rod about axis at one of its ends

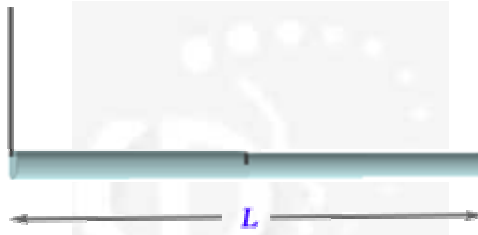

By applying parallel axis theorem and using the expression of rotational inertia of a thin rod about axis through its CM, we get

$$\begin{aligned}
 I_{\text{thinrod-axis at end}} &= \frac{1}{12} \times ML^2 + M\left(\frac{L}{2}\right)^2, \\
 &= \frac{1}{3} \times ML^2.
 \end{aligned}$$

(g)

Thin spherical shell about any diameter

Let radius of the shell be r , its thickness Δr and ρ be its density. Using spherical polar coordinates and measuring distance from the polar axis, we have

$$\begin{aligned}
 I_{\text{thin spherical shell}} &= \int_0^\pi d\theta \int_0^{2\pi} \rho \Delta r r^2 \sin \theta d\phi (r \sin \theta)^2, \\
 &= \rho \Delta r r^4 \times 2\pi \times \int_0^\pi \sin^3 \theta d\theta, \\
 &= \frac{8\pi}{3} \times \rho \Delta r r^4.
 \end{aligned}$$

Mass of a spherical shell of radius r , thickness Δr and density ρ is

$$M = 4\pi r^2 \Delta r \rho.$$


Using this expression for M , the rotational inertia of a thin spherical shell of radius r can be expressed as

$$I_{\text{thin spherical shell}} = \frac{2}{3} \times Mr^2.$$

(h)

Rotational inertia of a solid sphere

With this result we obtain next the rotational inertia of a solid sphere of radius R about any diameter.

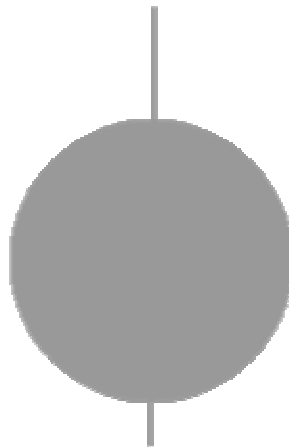

Integrating the thin spherical shell expression with respect to r from 0 to R , we get

$$I_{\text{sphere}} = \frac{8\pi}{3} \times \rho \int_0^R r^4 dr,$$

$$I_{\text{sphere}} = \frac{8\pi R^5}{15}.$$

Mass of a homogeneous sphere of radius R and density ρ is

$$M = \frac{4\pi R^3}{3}.$$


We thus find

$$I_{\text{sphere}} = \frac{2}{5} MR^2.$$

(i)

Rotational inertia of a thin slab

Thin slab of length a and width b

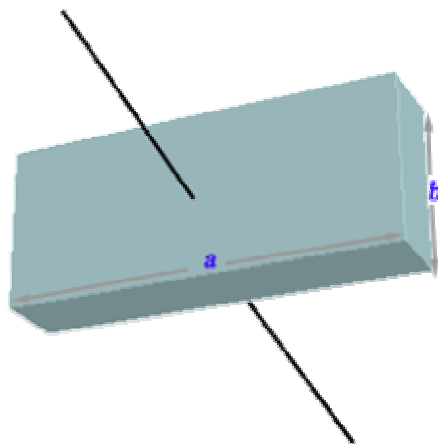

Let the length of the slab be a , its width be b , its thickness be Δc and its density be ρ . Its rotational

inertia about an axis perpendicular to its plane and passing through its centre of mass can be calculated by integrating the following expression;

$$I = \Delta c \rho \int_{-a/2}^{a/2} dx \int_{-b/2}^{b/2} (x^2 + y^2) dy,$$
$$= \frac{\Delta c \rho ab}{12} (a^2 + b^2).$$

Mass of the slab is

$$M = \Delta c \rho ab.$$

We thus find

$$I_{thin\ slab} = \frac{1}{12} M (a^2 + b^2).$$